



# 767-300BCF Specifications

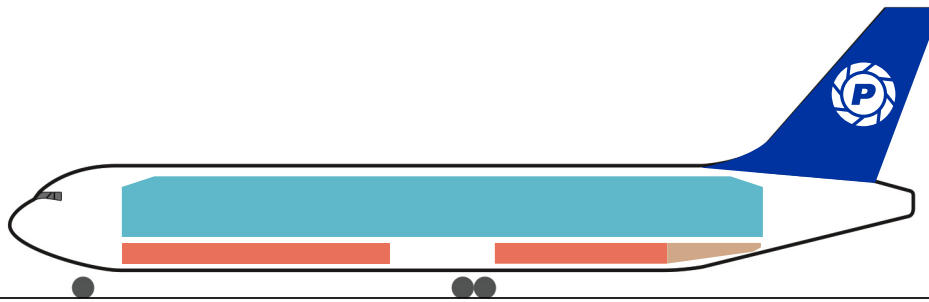


### Specifications for Selected ULDs

ULD Common Designation	Max External Dimensions L x W x H (in/cm)	Internal Cubic Capacity (ft³/m³)	Maximum Gross Weight (lb/kg)	Weight Tare (approx) (lb/kg)
M-1	96 x 125 x 96 in 244 x 317.5 x 244 cm	623 ft³ 17.6 m³	15,000 lb 6,804 kg	772 lb 350 kg
LD-1	60.4 x 92.0 x 64.0 in 153.4 x 233.7 x 164.6 cm	175 ft³ 5.0 m³	3,501 lb 1,588 kg	265 lb 120 kg
P6P	96 x 125 x (64 to 96) in 244 x 317.5 (162.2 to 244) cm	407 to 666 ft³ 11.5 to 18.8 m³	Variable	265 lb 120 kg


### Cross Section Showing Main Deck and Lower Compartment

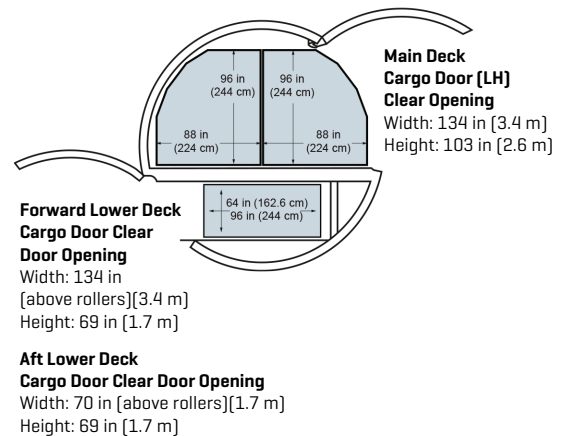

### Typical Main Deck Cargo Layout



### Typical Lower Lobe Cargo Layout

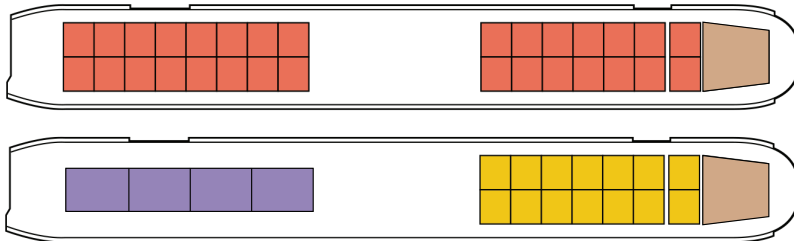

### Cargo Layout Legend

Main Deck	Lower Lobe
[24] 88 in x 125 in x 96 in Longitudinal Pallets/Containers	[30] LD-3 60.4 in x 61.5 in Containers
[17] 88 in x 96 in x 125 in Lateral Pallets/Containers	[15] LD-8 60.4 in x 125 in Containers
[14] 96 in x 125 in x 96 in Lateral Pallets/Containers	[4] 125 in x 96 in Pallets
[12] 96 in x 125 in x 96 in Longitudinal Pallets/Containers	[1] Bulk
[5] 96 in x 196 in x 96 in Pallets	

### Main Deck Side Door Package Length Limitations

Width in Inches	10	20	30	40	50	60	70	80	90	100	110	120	130
Height in Inches 103	247 <sup>(a)</sup>	213 <sup>(a)</sup>	191 <sup>(a)</sup>	172 <sup>(a)</sup>	155 <sup>(a)</sup>	139 <sup>(a)</sup>	118 <sup>(a)</sup>	80	80	80	80	80	80
95	399 <sup>(a)</sup>	340 <sup>(a)</sup>	297 <sup>(a)</sup>	264 <sup>(a)</sup>	238 <sup>(a)</sup>	217 <sup>(a)</sup>	201 <sup>(a)</sup>	184 <sup>(a)</sup>	163 <sup>(a)</sup>	137 <sup>(a)</sup>	107	107	107
80	613 <sup>(a)</sup>	489 <sup>(a)</sup>	407 <sup>(a)</sup>	349 <sup>(a)</sup>	306 <sup>(a)</sup>	272 <sup>(a)</sup>	246 <sup>(a)</sup>	225 <sup>(a)</sup>	209 <sup>(a)</sup>	190 <sup>(a)</sup>	166 <sup>(a)</sup>	140	140
65	884 <sup>(a)</sup>	655 <sup>(a)</sup>	520 <sup>(a)</sup>	431 <sup>(a)</sup>	369 <sup>(a)</sup>	322 <sup>(a)</sup>	286 <sup>(a)</sup>	257 <sup>(a)</sup>	235 <sup>(a)</sup>	217 <sup>(a)</sup>	196 <sup>(a)</sup>	169 <sup>(a)</sup>	161
0-46	1264 <sup>(a)</sup>	845 <sup>(a)</sup>	634 <sup>(a)</sup>	507 <sup>(a)</sup>	422 <sup>(a)</sup>	361 <sup>(a)</sup>	315 <sup>(a)</sup>	280 <sup>(a)</sup>	251 <sup>(a)</sup>	228 <sup>(a)</sup>	210 <sup>(a)</sup>	181 <sup>(a)</sup>	177

<sup>(a)</sup>Packages that are rotated through the door.

### 767-300BCF Specifications

Maximum Revenue Payload	116,800 lb	52,980 kg	Cruise Speed	530 mph	853 km/h
Main Cargo Compartment	11,884 ft³	336.5 m³	Maximum Design Range	3,120 nmi	5,775 km
Lower Forward Compartment	1,660 ft³	46.8 m³	Maximum Gross Takeoff Weight	412,000 lb	186,880 kg
Lower Aft Compartment	1,750 ft³	49.5 m³	Maximum Gross Landing Weight	326,000 lb	147,870 kg
Bulk Compartment	430 ft³	12.2 m³			

Cargo data based on Weight & Balance Manual